

EQV

R-407C

WATERCOOLED HEATPUMP VERTICAL UNIT CONSOLE TYPE OR RECESSED



Size	Cooling [kW]	Heating [kW]
5	1,9	2,2
7	2,4	2,5
9	2,6	2,5
15	3,3	3,2
17	3,7	3,7

The Versatemp EQV units offer a range of five quiet and efficient water-to-air reverse cycle heat pumps.

The units feature R407C refrigerant, two double inlet centrifugal direct coupled fans with 3 speed sealed for the life motors. Optional fascia (for direct wall mounting installations) made from aluzink and painted in white RAL9002. Units are redesigned for ease of installation, service and maintenance.

The units automatically provide cooling or heating to ensure year round comfort. The microprocessor control system also provides other important functions such as monitoring and group control.

Options include cased, cased front entry air, basic for installation behind surround and basic with front entry return air. Plinth, grills and discharge ducts are all available to aid installation issues.

STANDARD UNIT SPECIFICATIONS

COMPRESSOR

hermetic rotary compressor with gas compression in the crankcase, direct suction, no oil heater. It is mounted on antivibration rubber pads. Includes oil feed.

STRUCTURE

structure made entirely from "aluzink" plate that guarantees excellent mechanical characteristics and high corrosion strength over time. The compressor area is made from thick metal plate and is completely insulated with soundproofing material to minimise noise output. The ventilating section is completely lined with anti-condensate and soundproofing material.

PANELLING

external fairing made from "aluzink" plate and powder painted (colour RAL 9002, rough texture), fastened to the unit by two compression hooks and an easily-removable screw, enabling fast access to the internal components. Where necessary, insulated with anti-condensate and soundproofing material.

AIR EXCHANGER

direct expansion finned exchanger, made from copper pipes in staggered rows and mechanically expanded to the fin collars. The fins are made from aluminium with a corrugated surface and adequately distanced to ensure the maximum heat exchange efficiency.

WATER EXCHANGER

Full copper tube-in-tube exchanger, hermetically welded to the refrigerant circuit.

Checked at a pressure of 30 bars and welded in nitrogen atmosphere to avoid oxidation.

Includes antifreeze protection at water outlet.

Version:

High efficiency (H)

plate exchanger

brazed-plate exchanger in AISI 316 stainless steel for increased surface exchange with external thermal/anticondensate insulation

FAN

dual intake centrifugal fan with forward blades for maximum efficiency and low noise. Statically- and dynamically-balanced according to the ISO 1940 standards, section 6.3. The scroll, the rotor and the frame are made from galvanized steel plate (semdzimir).

Directly coupled to the electric motor.

REFRIGERANT CIRCUIT

The circuit is complete with:

-liquid receiver

-high pressure switch

-4-way reverse cycle valve

-non-return valve

-expansion device

FILTRATION

NAN honeycomb mesh air filter made from neutral multiply polypropylene fabric (weighted efficiency A –gravimetric method – 48%).

TRAY

Inox steel AISI 304 condensate collection tray with anti-condensate insulation, welded, fitted with drain pipe

ELECTRICAL PANEL

the electrical panel, including the microprocessor controller, is positioned inside the units, with access through an easy-to-remove panel.

the Power Section includes:

-power input terminals

-auxiliary circuit fuse

-compressor control contactor

-isolating transformer for auxiliary circuit power supply

the control section includes:

-antifreeze protection

-compressor overload protection and timer

-electronic thermostat for air temperature control

-centralised alarms with remote signalling

-remote ON/OFF control

-complete alarm management with log

-On/off switch

-Active alarm or function signal LED

-terminal block for connection to room thermostat;

-microprocessor control

ACCESSORIES

-manual two-way valve at the inlet and outlet of each exchanger on the water side. Used to isolate the unit from the water circuit to allow any maintenance operations.

-ON/OFF solenoid valve, water side

-serial connection kit for connecting the unit control module to a centralised control system (PC or BMS).

-Versatemp series electronic thermostat (English market)

-remote thermostat

-Versatemp control (english market)

-water flow setter (manual valve)

-painted plinth for floor standing arrangement

-water circuit connection hoses plus condensate drain pipe

-condensate discharge pump


-outlet duct

-outlet grille with flexible joint for architectural surround

-coil antifreeze protection sensor

-differential pressure switch, water side

CONFIGURATION CODE

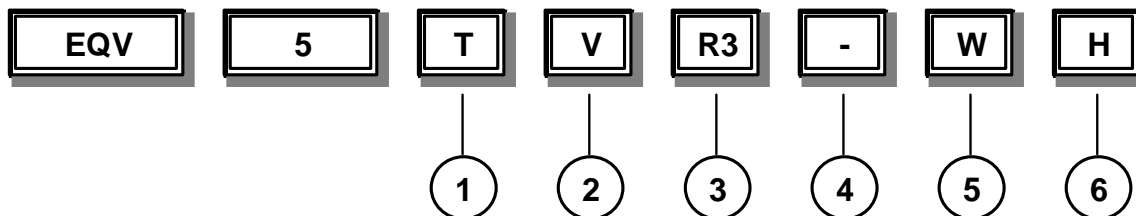

(1) CONTROL

Onboard keypad (T)

standard

remote keypad (TR)

unit supplied without onboard keypad

(2) CABINET

Vertical in view (V)

unit with RAL 9002 painted fascia

Vertical flush-mounted (VC)

unit supplied less fascia for mounting behind architectural surrounds

(3) INTAKE

Bottom intake (R3)

standard

Frontal return air inlet (FR)

upon request, the units can be supplied with front intake

(4) LOW TEMPERATURE

Low air temperature (B)

coil antifreeze protection sensor

Not required (-)

standard

(5) APPLICATION

Water loop (W)

standard

Geothermal (G)

units for geothermal applications


(6) ENERGY EFFICIENCY

High efficiency (H)



plate exchanger for greater efficiency with R-407C

Standard (S)

CONDENSER PRESSURE DROP

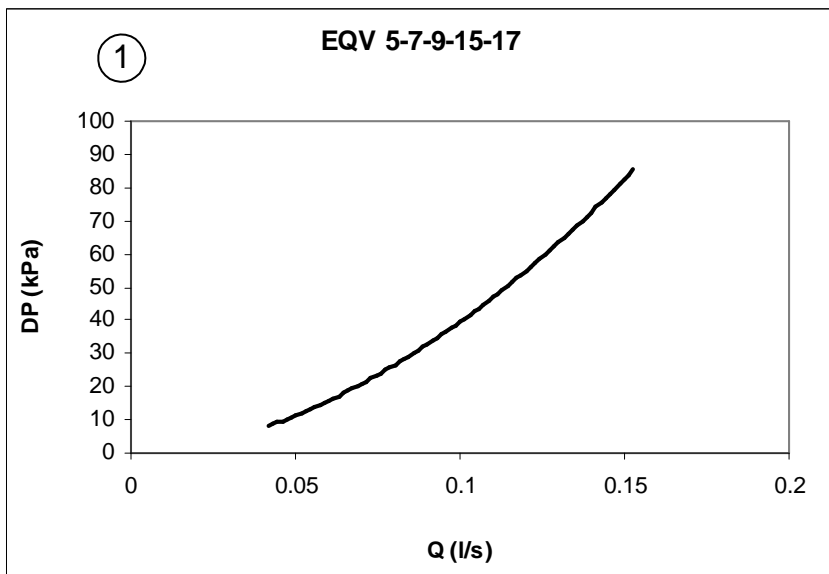

Q = WATER FLOW
DP = PRESSURE DROP
(1) TUBE IN TUBE EXCHANGER
(2) PLATE EXCHANGER

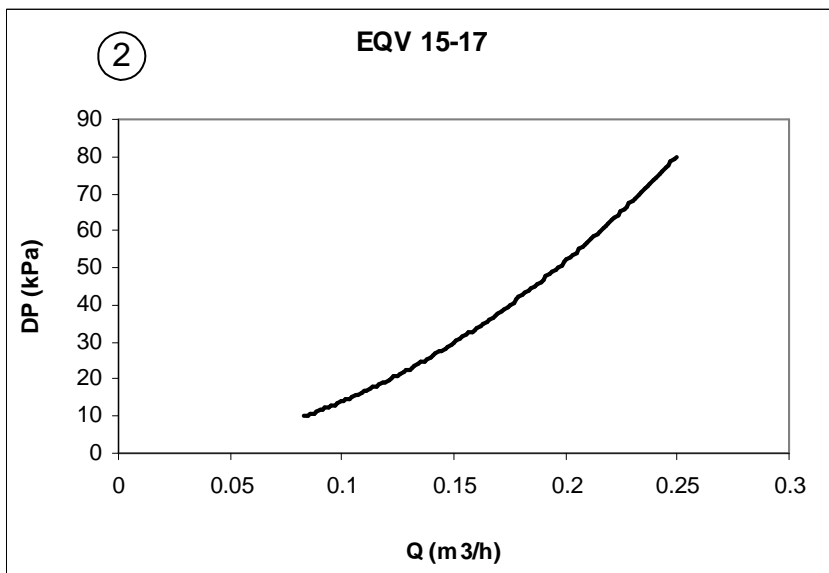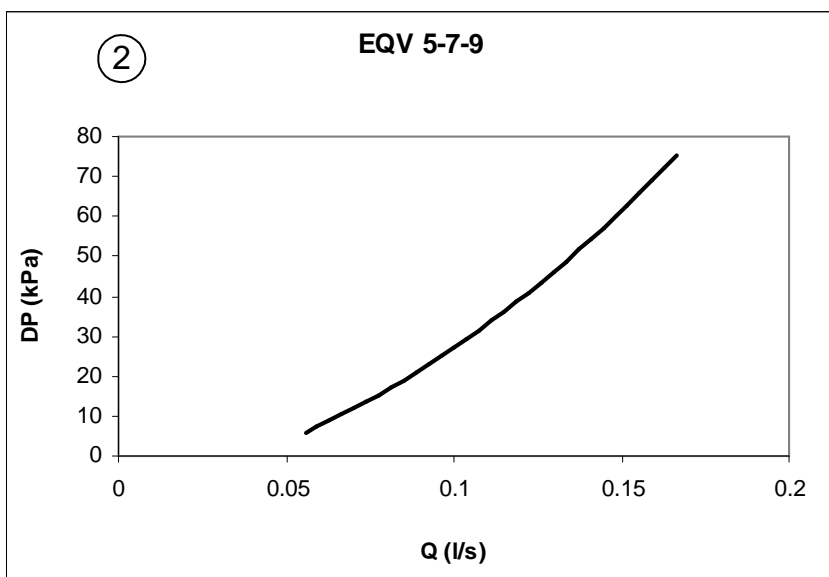

GENERAL TECHNICAL SPECIFICATIONS

Size		5	7	9	15	17
COOLING						
Cooling capacity	1 kW	1,9	2,4	2,6	3,3	3,7
Sensible capacity	2 kW	1,6	2,1	2,2	2,8	3,2
Compressor power input	2 kW	0,5	0,7	0,8	1	1,2
Total power input	2 kW	0,6	0,8	0,9	1,1	1,3
HEATING						
Heat output	3 kW	2,2	2,5	2,5	3,2	3,7
Compressor power input	4 kW	0,5	0,6	0,7	0,9	1,1
Total power input	4 kW	0,6	0,7	0,8	1	1,2
COMPRESSOR						
Type of compressors	5	ROT	ROT	ROT	ROT	ROT
No. of Compressors	Nr	1	1	1	1	1
AIR HANDLING SECTION						
Front surface	m2	0,201	0,201	0,201	0,186	0,186
Number of rows	Nr	2	2	2	3	3
Fin spacing	mm	2,1	2,1	2,1	2,1	2,1
AIR HANDLING SECTION FANS (OUTLET)						
Type of fans	6	CFG	CFG	CFG	CFG	CFG
Standard air flow	l/s	180	180	180	220	220
Installed unit power	kW	0,1	0,1	0,1	0,14	0,14
CONDENSER						
Water flow-rate	7 l/s	0,064	0,064	0,075	0,114	0,114
Pressure drop	kPa	16	16	23	46	46
CONNECTIONS						
Water fittings	8 mm	1/2"	1/2"	1/2"	1/2"	1/2"
Condensate discharge	9 mm	15	15	15	15	15
STANDARD UNIT WEIGHTS						
Shipping weight	kg	74	74	75	78	78
DIMENSIONS						
Length	10 mm	1264	1264	1264	1335	1335
Depth	10 mm	242	242	242	242	242
Height	10 mm	589	589	589	589	589

(1) Ambient temperature 27°C/19.5 WB evaporator inlet water 30°C deduced the fan power absorption
 (2) Ambient temperature 27°C/19.5 WB evaporator inlet water 30°C
 (3) ambient temperature 20°C DB exchanger water inlet 20°C deduced the fan power absorption
 (4) ambient temperature 20°C DB exchanger water inlet 20°C

(5) ROT = rotary compressor
 (6) CFG = centrifugal fan
 (7) tolerance allowed +/- 20%
 (8) female GAS fitting
 (9) pipe outside diameter
 (10) dimensions relating to the unit with cabinet

ENERGY EFFICIENCY: HIGH EFFICIENCY (H)

GENERAL TECHNICAL SPECIFICATIONS

Size		5	7	9	15	17
COOLING						
Cooling capacity	1 kW	2,2	2,6	2,9	3,9	4,2
Sensible capacity	2 kW	1,9	2,1	2,2	3,2	3,2
Compressor power input	2 kW	0,5	0,7	0,8	1	1,2
Total power input	2 kW	0,6	0,8	0,9	1,1	1,3
HEATING						
Heat output	3 kW	2,4	3	3,6	5	5,1
Compressor power input	4 kW	0,5	0,7	1	1,2	1,4
Total power input	4 kW	0,6	0,8	1,1	1,3	1,5
CONDENSER						
Water flow-rate	5 l/s	0,11	0,13	0,13	0,18	0,19
Pressure drop	kPa	34	45	45	40	46

(1) Ambient temperature 27°C/19.5 WB evaporator inlet water 30°C deduced the fan power absorption
 (2) Ambient temperature 27°C/19.5 WB evaporator inlet water 30°C
 (3) ambient temperature 20°C DB exchanger water inlet 20°C deduced the fan power absorption

(4) ambient temperature 20°C DB exchanger water inlet 20°C
 (5) tolerance allowed +/- 20%
 plate exchanger for greater efficiency with R-407C
 we recommend the accessory differential pressure switch

BT02E008GB-02

ELECTRICAL DATA

Size			5	7	9	15	17
F.L.A. - FULL LOAD CURRENT AT MAX ADMISSIBLE CONDITIONS							
Compressor 1 (230/1/50)		A	3	3,6	4,3	6	6,3
Outlet fan (230/1/50)		A	0,8	0,8	0,8	0,8	0,8
Total (230/1/50)		A	3,8	4,4	5,1	6,8	7,1
L.R.A. LOCKED ROTOR AMPERES							
Compressor 1 (230/1/50)		A	15,5	20,5	24	35	35
Outlet fan (230/1/50)		A	1	1	1	1	1
M.I.C. MAXIMUM INRUSH CURRENT							
Value (230/1/50)		A	16,5	21,5	25	36	36

 Voltage
 230/1/50

OPERATING LIMITS (COOLING)

Size			5	7	9	15	17
CONDENSER							
Max water inlet temperature	1	°C	45	45	45	45	45
Min. water inlet temperature		°C	18	18	18	18	18
Maximum water side pressure		bar	13,8	13,8	13,8	13,8	13,8
EVAPORATOR							
Min air inlet temperature (W.B.)	2	°C	13	13	13	13	13
Max. air temperature inlet (D.B.)		°C	29	29	29	29	29
Max ambient relative humidity		%	70	70	70	70	70

OPERATING LIMITS (HEATING)

CONDENSER							
Max water inlet temperature	1	°C	45	45	45	45	45
Min. water inlet temperature	1	°C	18	18	18	18	18
Min. water outlet temperature	3	°C	7	7	7	7	7
Maximum water side pressure		bar	13,8	13,8	13,8	13,8	13,8
Max. air temperature inlet (D.B.)		°C	29	29	29	29	29

 DB = dry bulb
 WB = wet bulb

- (1) with nominal water flow
 (2) we recommend the defrost sensor
 (3) once-through water system

AIR FLOW / FAN SPEED

Size			5	7	9	15	17
Air flow (minimum speed)		l/s	90	90	90	125	125
Air flow (medium speed)		l/s	130	130	130	175	175
Air flow (maximum speed)		l/s	180	180	180	220	220

 Voltage
 230/1/50

SOUND LEVELS

FAN SPEED: Standard Speed (S)

Size	Sound Power Level (dB)								Sound pressure level	Sound power level
	Octave band (Hz)									
	63	125	250	500	1000	2000	4000	8000	dB(A)	dB(A)
5	59	54	51	51	45	41	37	31	47	52
7	60	55	53	53	48	44	41	35	48	54
9	61	56	53	53	48	44	41	35	48	54
15	62	57	55	54	51	46	44	38	49	56
17	60	55	55	54	51	46	44	38	49	56

the sound levels are referred to a wall mounted unit, with cabinet and with several air flow. The sound pressure level is referred at a distance of 1 m. from unit surface working in free field conditions.

FAN SPEED: Medium speed (M)

Size	Sound Power Level (dB)								Sound pressure level	Sound power level
	Octave band (Hz)									
	63	125	250	500	1000	2000	4000	8000	dB(A)	dB(A)
5	57	52	47	45	40	34	29	23	41	46
7	60	55	50	48	43	38	34	28	43	49
9	60	55	51	50	44	41	37	31	45	51
15	60	55	53	52	47	44	40	34	46	53
17	62	57	53	54	50	47	43	37	49	56

FAN SPEED: Low speed (L)

Size	Sound Power Level (dB)								Sound pressure level	Sound power level
	Octave band (Hz)									
	63	125	250	500	1000	2000	4000	8000	dB(A)	dB(A)
5	57	52	45	41	36	30	25	19	38	43
7	60	55	48	42	38	31	27	21	39	45
9	60	55	49	47	41	39	34	28	43	49
15	44	40	34	60	55	49	50	47	45	52
17	61	56	50	53	50	47	43	37	48	55

PERFORMANCE CORRECTION COEFFICIENTS (AIR STANDARD FLOW-RATE ASSUMED AS 1)

	L					M					S				
	Kf	Ks	Kt	Kef	Ket	Kf	Ks	Kt	Kef	Ket	Kf	Ks	Kt	Kef	Ket
5	0,91	0,89	0,94	0,97	1,02	0,97	0,96	0,98	0,98	1,01	1,00	1,00	1,00	1,00	1,00
7	0,90	0,88	0,94	0,97	1,08	0,98	0,95	0,96	0,99	1,03	1,00	1,00	1,00	1,00	1,00
9	0,93	0,95	0,97	0,95	1,04	0,99	0,99	0,99	0,97	1,02	1,00	1,00	1,00	1,00	1,00
15	0,93	0,95	0,97	0,95	1,04	0,99	0,99	0,99	0,97	1,02	1,00	1,00	1,00	1,00	1,00
17	0,93	0,95	0,97	0,95	1,04	0,99	0,99	0,99	0,97	1,02	1,00	1,00	1,00	1,00	1,00

VOLTAGE
230/1/50

LOW SPEED (L)
MEDIUM SPEED (M)
STANDARD SPEED (S)

KF = COOLING PERFORMANCE MULTIPLICATION COEFFICIENT

KS= SENSIBLE OUTPUT MULTIPLICATION COEFFICIENT

KT = HEATING PERFORMANCE MULTIPLICATION COEFFICIENT

KEF = COMPRESSOR POWER INPUT MULTIPLICATION COEFFICIENT IN COOLING OPERATION

KET = COMPRESSOR POWER INPUT MULTIPLICATION COEFFICIENT IN HEATING OPERATION

COOLING PERFORMANCE

Size	Ta (°C) DB/WB	WATER OULET TEMPERATURE (°C) (DT = 8°C)																	
		28			33			38			43			48			50		
		kWf	kWe	kWs	kWf	kWe	kWs	kWf	kWe	kWs	kWf	kWe	kWs	kWf	kWe	kWs	kWf	kWe	kWs
5	22 / 16	1,70	0,52	1,45	1,72	0,50	1,46	1,71	0,51	1,47	1,66	0,55	1,48	1,57	0,61	1,49	1,52	0,64	1,50
	24 / 17	1,75	0,52	1,57	1,78	0,51	1,57	1,76	0,52	1,58	1,71	0,56	1,59	1,62	0,62	1,60	1,57	0,65	1,57
	26 / 19	1,86	0,54	1,55	1,88	0,53	1,56	1,86	0,54	1,57	1,81	0,58	1,58	1,71	0,64	1,59	1,66	0,67	1,59
	27 / 19,5	1,89	0,54	1,60	1,91	0,53	1,61	1,89	0,54	1,62	1,83	0,58	1,63	1,73	0,65	1,64	1,68	0,68	1,64
	28 / 21	1,97	0,56	1,52	1,99	0,54	1,53	1,97	0,56	1,54	1,90	0,60	1,54	1,80	0,66	1,55	1,74	0,70	1,56
	30 / 22	2,03	0,57	1,60	2,04	0,55	1,61	2,02	0,57	1,62	1,95	0,61	1,63	1,84	0,68	1,64	1,78	0,71	1,64
7	22 / 16	2,20	0,65	1,99	2,21	0,65	1,99	2,18	0,67	2,00	2,11	0,71	2,01	2,00	0,77	2,00	1,94	0,81	1,94
	24 / 17	2,27	0,66	2,13	2,28	0,66	2,13	2,25	0,68	2,14	2,18	0,72	2,14	2,07	0,79	2,07	2,01	0,82	2,01
	26 / 19	2,42	0,68	2,11	2,43	0,68	2,11	2,40	0,70	2,12	2,33	0,75	2,12	2,21	0,82	2,13	2,15	0,85	2,13
	27 / 19,5	2,46	0,69	2,15	2,47	0,68	2,16	2,44	0,71	2,16	2,36	0,75	2,17	2,25	0,83	2,18	2,19	0,86	2,18
	28 / 21	2,58	0,70	2,00	2,58	0,70	2,00	2,55	0,73	2,01	2,48	0,78	2,02	2,38	0,86	2,03	2,32	0,89	2,03
	30 / 22	2,66	0,72	2,01	2,66	0,72	2,02	2,63	0,74	2,03	2,56	0,80	2,04	2,47	0,88	2,05	2,42	0,92	2,05
9	22 / 16	2,38	0,75	2,05	2,40	0,74	2,06	2,36	0,76	2,07	2,28	0,81	2,07	2,15	0,88	2,08	2,09	0,91	2,08
	24 / 17	2,46	0,75	2,18	2,46	0,75	2,18	2,43	0,78	2,19	2,35	0,82	2,20	2,23	0,90	2,20	2,17	0,93	2,17
	26 / 19	2,61	0,78	2,17	2,61	0,78	2,18	2,57	0,80	2,18	2,49	0,85	2,19	2,38	0,93	2,19	2,32	0,97	2,19
	27 / 19,5	2,65	0,78	2,23	2,65	0,78	2,23	2,61	0,81	2,24	2,53	0,86	2,24	2,42	0,95	2,25	2,36	0,99	2,25
	28 / 21	2,78	0,80	2,14	2,77	0,80	2,14	2,73	0,84	2,15	2,65	0,89	2,15	2,54	0,98	2,15	2,48	1,02	2,15
	30 / 22	2,86	0,82	2,24	2,86	0,82	2,24	2,82	0,85	2,24	2,74	0,92	2,25	2,62	1,01	2,25	2,56	1,05	2,25
15	22 / 16	3,10	0,92	2,58	3,06	0,95	2,57	2,97	1,01	2,55	2,84	1,08	2,53	2,67	1,17	2,52	2,58	1,21	2,51
	24 / 17	3,21	0,92	2,74	3,16	0,96	2,72	3,07	1,01	2,70	2,94	1,08	2,69	2,76	1,17	2,67	2,68	1,21	2,66
	26 / 19	3,42	0,91	2,73	3,36	0,95	2,71	3,27	1,01	2,70	3,14	1,08	2,69	2,97	1,17	2,68	2,89	1,21	2,67
	27 / 19,5	3,47	0,91	2,81	3,41	0,95	2,80	3,32	1,01	2,79	3,19	1,08	2,78	3,02	1,17	2,77	2,94	1,21	2,76
	28 / 21	3,64	0,91	2,75	3,57	0,95	2,75	3,47	1,01	2,75	3,34	1,08	2,75	3,18	1,17	2,76	3,11	1,21	2,76
	30 / 22	3,75	0,90	2,93	3,68	0,94	2,94	3,58	1,00	2,95	3,45	1,07	2,97	3,30	1,16	2,98	3,23	1,21	2,99
17	22 / 16	3,59	1,03	2,97	3,49	1,07	2,95	3,36	1,13	2,94	3,19	1,23	2,93	3,00	1,35	2,91	2,91	1,40	2,90
	24 / 17	3,70	1,04	3,14	3,60	1,09	3,13	3,47	1,16	3,11	3,30	1,26	3,10	3,10	1,38	3,09	3,01	1,44	3,01
	26 / 19	3,92	1,06	3,12	3,82	1,13	3,11	3,68	1,22	3,10	3,50	1,33	3,09	3,29	1,46	3,08	3,19	1,52	3,08
	27 / 19,5	3,98	1,07	3,21	3,87	1,15	3,20	3,73	1,24	3,20	3,55	1,35	3,19	3,34	1,49	3,18	3,24	1,55	3,18
	28 / 21	4,15	1,09	3,14	4,02	1,18	3,14	3,86	1,29	3,13	3,68	1,42	3,13	3,47	1,56	3,13	3,38	1,62	3,13
	30 / 22	4,26	1,10	3,36	4,11	1,21	3,36	3,95	1,33	3,36	3,76	1,46	3,36	3,56	1,61	3,36	3,47	1,68	3,36

data refers to the following conditions :
deducted the fan power absorption
data at variable water flow: at costant water flow, the IN/OUT water temperature changes according to working conditions

Ta = evaporator inlet air temperature
DB = dry bulb
WB = wet bulb
kWf = Cooling capacity in kW
kWs = sensible cooling capacity (kW)
kWe = Compressor power input in kW

BT02E008GB-02

HEATING PERFORMANCE

Size	Ta (°C)	WATER OULET TEMPERATURE (°C) (DT = 8°C)											
		7		12		17		22		24		27	
		kWt	kWe	kWt	kWe	kWt	kWe	kWt	kWe	kWt	kWe	kWt	kWe
5	14	2,00	0,42	2,27	0,47	2,48	0,51	2,64	0,54	2,69	0,55	2,74	0,56
	16	1,98	0,45	2,25	0,49	2,46	0,53	2,62	0,56	2,67	0,57	2,72	0,58
	18	1,95	0,47	2,22	0,51	2,44	0,55	2,60	0,58	2,65	0,59	2,70	0,61
	19	1,94	0,48	2,21	0,52	2,43	0,56	2,59	0,59	2,64	0,60	2,69	0,62
	20	1,93	0,49	2,20	0,53	2,42	0,57	2,58	0,60	2,63	0,61	2,68	0,63
	21	1,92	0,50	2,19	0,54	2,41	0,58	2,57	0,61	2,62	0,63	2,67	0,64
	22	1,90	0,51	2,18	0,55	2,40	0,59	2,56	0,63	2,61	0,64	2,66	0,65
7	14	2,21	0,48	2,54	0,54	2,82	0,59	3,04	0,63	3,12	0,65	3,23	0,68
	16	2,21	0,51	2,53	0,56	2,80	0,61	3,01	0,66	3,07	0,68	3,16	0,70
	18	2,19	0,53	2,52	0,59	2,78	0,64	2,98	0,69	3,04	0,70	3,12	0,73
	19	2,19	0,55	2,51	0,60	2,77	0,65	2,97	0,70	3,03	0,72	3,10	0,74
	20	2,18	0,56	2,50	0,61	2,76	0,67	2,96	0,71	3,02	0,73	3,10	0,76
	21	2,17	0,57	2,49	0,62	2,75	0,68	2,95	0,73	3,02	0,75	3,10	0,77
	22	2,16	0,58	2,47	0,64	2,74	0,69	2,95	0,74	3,02	0,76	3,10	0,79
9	14	2,23	0,59	2,52	0,64	2,76	0,68	2,96	0,73	3,02	0,75	3,10	0,78
	16	2,22	0,62	2,51	0,66	2,75	0,71	2,94	0,76	3,01	0,79	3,10	0,82
	18	2,21	0,64	2,49	0,69	2,73	0,74	2,93	0,80	3,00	0,82	3,10	0,86
	19	2,21	0,65	2,48	0,70	2,73	0,76	2,93	0,82	3,00	0,84	3,10	0,88
	20	2,20	0,66	2,48	0,72	2,72	0,77	2,93	0,83	3,00	0,86	3,10	0,90
	21	2,19	0,68	2,47	0,73	2,71	0,79	2,92	0,85	3,00	0,88	3,10	0,92
	22	2,18	0,69	2,46	0,74	2,71	0,81	2,92	0,87	3,00	0,90	3,10	0,94
15	14	2,86	0,74	3,23	0,79	3,52	0,81	3,73	0,83	3,79	0,83	3,85	0,82
	16	2,86	0,78	3,22	0,82	3,50	0,84	3,69	0,85	3,75	0,85	3,80	0,85
	18	2,87	0,82	3,21	0,85	3,48	0,87	3,66	0,88	3,71	0,88	3,76	0,87
	19	2,87	0,84	3,21	0,87	3,47	0,89	3,65	0,89	3,70	0,89	3,75	0,88
	20	2,87	0,86	3,20	0,89	3,46	0,90	3,64	0,91	3,69	0,91	3,74	0,90
	21	2,87	0,88	3,20	0,90	3,45	0,92	3,63	0,92	3,68	0,92	3,73	0,91
	22	2,86	0,89	3,19	0,92	3,44	0,93	3,62	0,94	3,67	0,93	3,72	0,93
17	14	3,44	0,98	3,80	1,00	4,09	1,04	4,32	1,08	4,39	1,10	4,49	1,13
	16	3,40	0,99	3,77	1,03	4,08	1,08	4,32	1,14	4,40	1,17	4,49	1,21
	18	3,36	1,00	3,75	1,06	4,07	1,13	4,31	1,20	4,39	1,23	4,48	1,28
	19	3,34	1,01	3,74	1,08	4,06	1,16	4,30	1,23	4,37	1,27	4,46	1,31
	20	3,32	1,02	3,73	1,10	4,05	1,18	4,29	1,26	4,36	1,30	4,44	1,35
	21	3,31	1,03	3,72	1,12	4,05	1,21	4,28	1,29	4,34	1,33	4,41	1,38
	22	3,29	1,03	3,72	1,14	4,04	1,23	4,26	1,32	4,32	1,36	4,37	1,41


data refers to the following conditions :
deducted the fan power absorption
data at variable water flow: at constant water flow, the IN/OUT water temperature changes according to working conditions

Ta = condenser air intake temperature
kWt = heating capacity (kW)
kWe = Compressor power input in kW

DIMENSIONAL DRAWING

Size		5	7	9	15	17
A	mm	1264	1264	1264	1335	1335
B	mm	242	242	242	242	242
C	mm	589	589	589	589	589
D	mm	995	995	995	995	995
E	mm	358	358	358 <td 358	358	
F	mm	368	368	368	368	368
G	mm	1221	1221	1221	1292	1292
H	mm	230	230	230	230	230
I	mm	560	560	560	560	560
L	mm	756	756	756	826	826
M	mm	358	358	358	358	358
N	mm	368	368	368	368	368
O	mm	756	756	756	826	826

DIMENSIONAL DRAWING

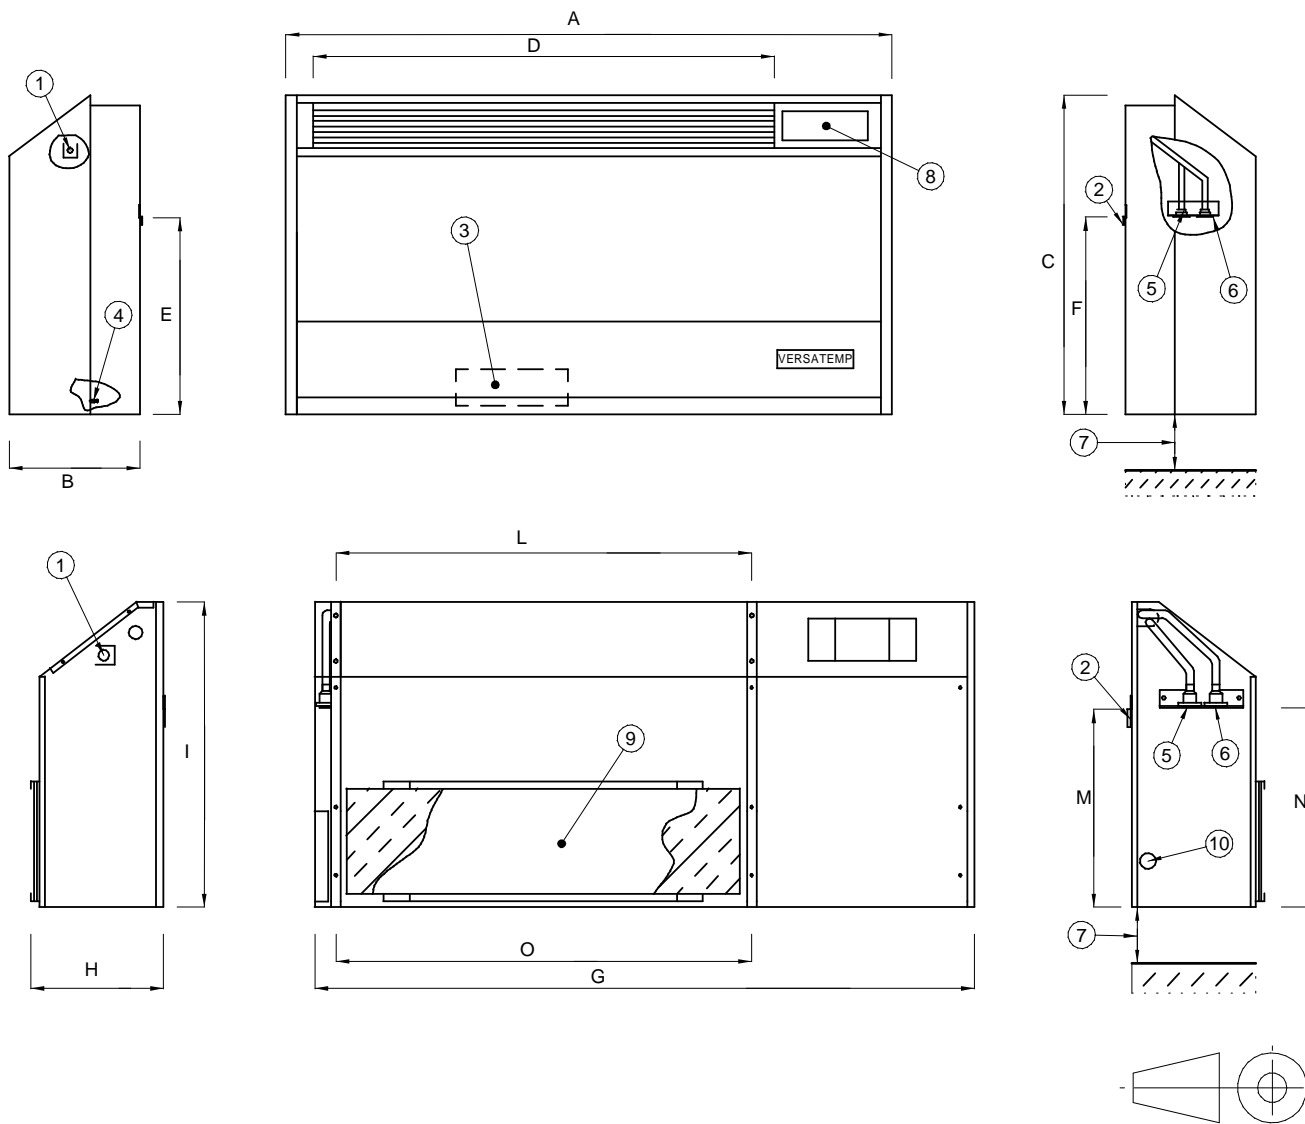

- (1) POWER INPUT
- (2) UNIT WALL-MOUNTING BRACKET
- (3) OUTSIDE AIR INTAKE
- (4) FAIRING FASTENING SYSTEM (COMPRESSION)
- (5) CONDENSER WATER INLET
- (6) CONDENSER WATER OUTLET
- (7) MINIMUM DISTANCE BETWEEN UNIT AND LOWER SURFACE (100 MM)
- (8) UNIT MOUNTED THERMOSTAT
- (9) FRONT AIR INTAKE (OPTIONAL)
- (10) CONDENSATE DRAIN PIPE OUTLET

BT02E008GB-02

CLIVET S.P.A.
Feltre (BL) ITALY
Tel. +39 0439 3131
Fax +39 0439 313300
info@clivet.it

CLIVET ESPAÑA SA
Madrid SPAIN
Tel. +34 91 6852344
Fax +34 91 6852355
info@clivet.es

CLIVET UK LTD
Sevenoaks (Kent) U.K.
Tel. +44 (0) 1732 464141
Fax +44 (0) 1732 741575
info@clivetaircon.co.uk

Fareham (Hampshire) U.K.
Tel. +44 (0) 1489 572238
Fax +44 (0) 1489 573033
info@clivet-uk.co.uk